


CABLE TRUNKING

2025

Famateel.uk




Cable Trunking

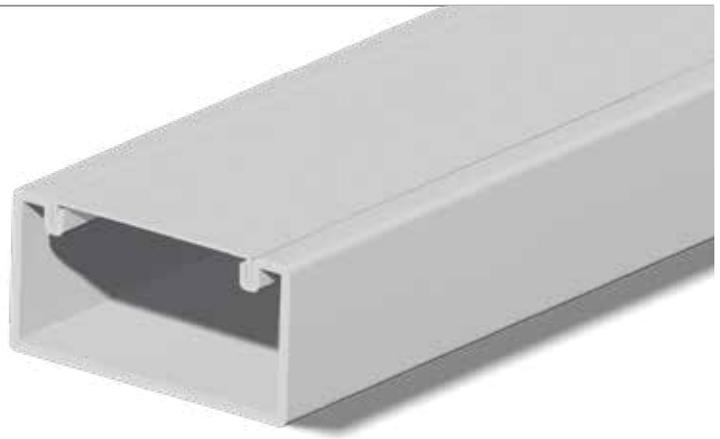

CLASSIFICATION		BUILD CHARACTERISTICS	
Material	Isolated	Fixing With Screws	White RAL 9016 / 71504
Fixation	Wall	Directive Applied	2014/35/UE
Use	Indoor		
Impact Resistance	IK07		
Protection Degree	IP20		
Isolated Tension	1000V		
Glow Wire	650°C		
Temperature	-15°C / +70°C		
Humidity	100% HR		

Logistics and Packaging Information

PACKAGING	SHIPPINH WIEGHT	SHIPPING DIMENSIONS
12 meters per carton	11,64 kg	100x300x2000 mm

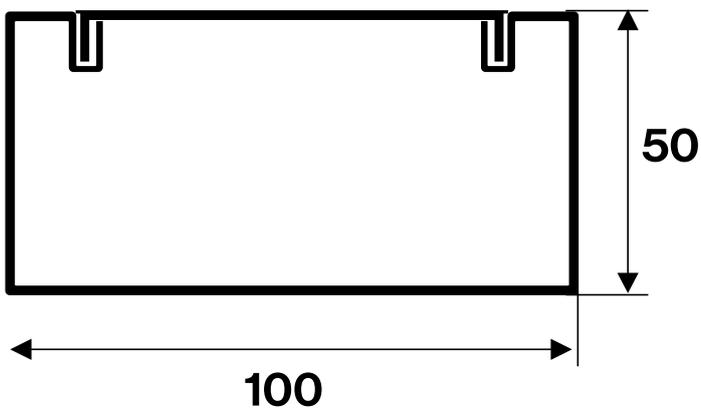


Cable Trunking

ACCESSORIE

CLASSIFICATION		BUILD CHARACTERISTICS	
Material	Isolated	Material	Easy Installation
Fixation	Wall		
Use	Indoor	REFERENCES	
Impact Resistance	IK07	White Rall 9016	71504-A
Protection Degree	IP20		
Isolated Tension	1000V		
Glow Wire	650°C		
Temperature	-25°C / + 85°C		
Humidity	100% HR		

Logistics and Packaging Information

PACKAGING	SHIPPINH WIEGHT	SHIPPING DIMENSIONS
120 units per carton	12 kg	400x600x400 mm

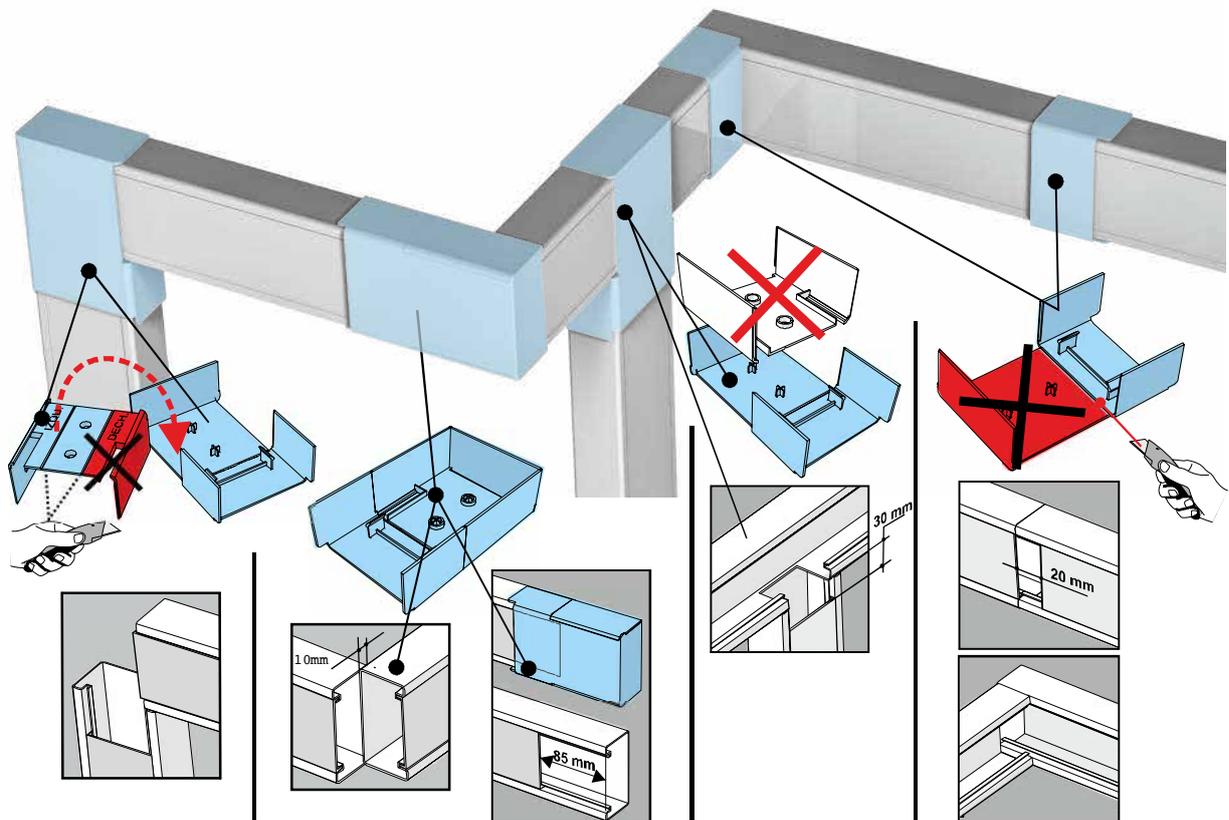





Cable Trunking

ACCESSORIE

CLASSIFICATION		BUILD CHARACTERISTICS	
Material	Isolated	Material	Easy Installation
Fixation	Wall		
Use	Indoor	REFERENCES	
Impact Resistance	IK07	White Rall 9016	71504-M
Protection Degree	IP20		
Isolated Tension	1000V		
Glow Wire	650°C		
Temperature	-25°C / + 85°C		
Humidity	100% HR		

Logistics and Packaging Information

PACKAGING	SHIPPINH WIEGHT	SHIPPING DIMENSIONS
250 units per carton	9,25 kg	400x600x400 mm

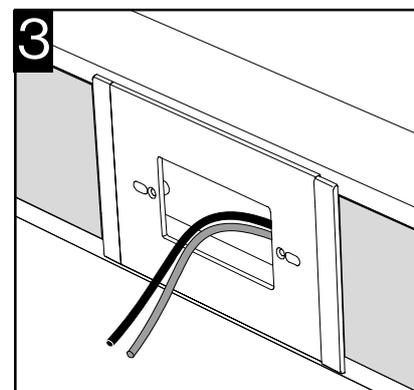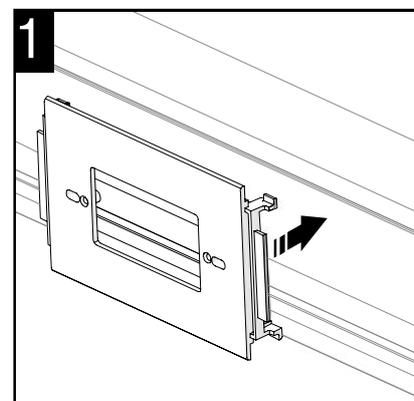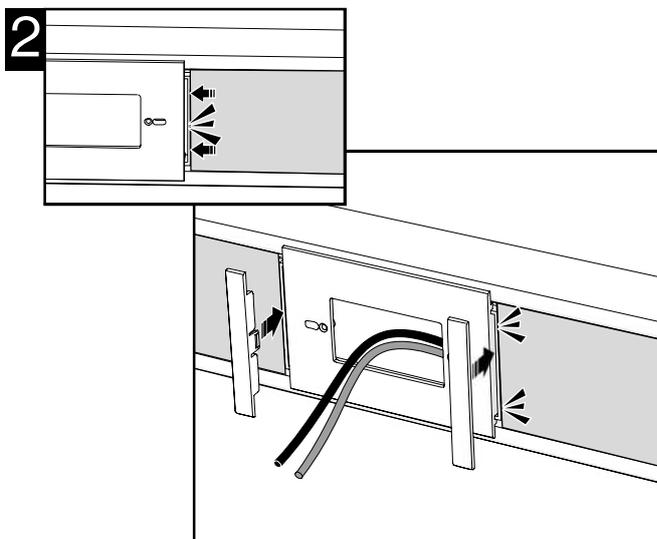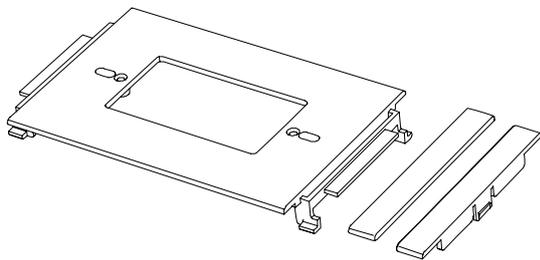



Famatel.uk

famatel.co.uk

Unit 34 to 36 Buckingham
Road, Lynx Crescent
Weston Industrial Estate,
Weston Super Mare
BS24 9BG

-  ...company/famatel-uk/
-  @famateluk1627
-  @famatel_uk