



# E1 Removable Door Cabinets



### Main Features

Vandal resistant

Flush fitting doors

**Root mounted** 

Radius corners eliminate sharp edges

Fabricated from 3mm mild sheet steel

Hot dipped galvanised finish to BS EN ISO 1461

### Internal

Fitted with back board made from 12 mm external grade plywood.

Stainless steel earth terminal and earth strap between cabinet and door.

### Locks

Secured by 2 stainless steel tri-head screws.

Extra centre lock can be added to 146, 189 & 3012.

# Finish

### Galvanised as standard.

In addition we offer a galvanised and textured painted finish, available in the following colours Grey RAL 7031, Black RAL 9005 or Green BS 4800 14C 39.

# **Options**

Quotations for other RAL numbers upon request.


Available pre-wired if requested

### Sizes

See reverse



Tri Screv

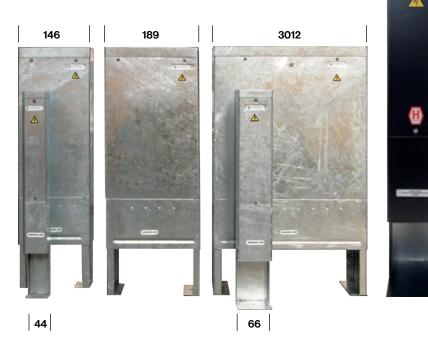















# E1 Removable Door Cabinets Standard pillar range dimensions

Part Number	E1/HDP/44/ SPD	E1/HDP/66/ SPD	E1/HDP/146/SPD	E1/HDP/189/SPD	E1/HDP/3012/ SPD	E1/HDP/3012H/ SPD
Height above ground	706	706	950	950	950	1150
Width (internal)	100	150	350	450	750	750
Depth (internal)	100	150	150	230	300	300
Root	300	300	300	300	300	300
Door aperture	90×500	140×500	340×680	440×680	740×680	740×680
Fuseboard	80×486	130×486	330×700	370×700	710×710	710×900
*Pair of fuseboards on sides of pillar	n/a	n/a	80×700	160×700	200×700	200×900
Cable entry	100×220	150×220	244 wide	344 wide	644 wide	644 wide
Working depth	88	135	117	200	270	270
Add to part number	G - galvanised P - painted					





